

面对复杂多变的工矿环境，凯程致力于
水工业流体技术和环保产业开发制造，
提供优质产品、技术和工程的全面系统解决方案。

Facing the complex and changable industrial environment,
KaiCheng is committed to studying industrial fluid technology
and developing environmental protection industry.
We devote ourself to providing high quality products,
technology and a whole set solutions in engineering.

工业流体输送专家

Experts in Water industry liquid transportation



KCMP
凯程泵阀

KCW卧式管道离心泵 KCW HORIZONTAL CENTRIFUGAL PUMPS

产品说明书 Product specification



KCW型卧式离心泵产品简介 Brief Introduction of KCW Horizontal Centrifugal Pumps

► KCW型卧式离心泵 KCW Horizontal Centrifugal Pumps

KCW型
卧式离心泵、配Y2或Y系列电机、机械轴封
KCW
horizontal centrifugal pump,
Y or Y2 series motor,
shaft seal is mechanical seal



► 特点 Features

- KCW型凯程卧式离心泵是在IS型单级离心式清水泵及ISG型管道式离心泵的基础上进行设计制造而成;
- Designed on the basic of IS single stage centrifugal.
- 本系列泵在原IS泵的基础上对其结构进行了大胆的改进设计, 同时吸取了ISG型泵的优点, 性能参数采用了ISO2858标准, 产品质量执行JB/T53062-93标准, 其经济技术性能指标达到国内同类产品先进水平;
- Take advantage of virtues of ISG pump, performance data according to ISO2858 standard and product quality performs JB/T53062-93 standard so the technical performance is advanced in domestic congener products.
- KCW型泵由于电机与泵直联, 简化了中间传动的结构, 增强了运行的平稳性, 并比普通卧式泵占地面积减少了30%, 轴封采用硬质合金机械密封, 寿命长, 且具有噪音低、维修方便、振动小等优点。
- The motor and pump are joined directly without transmission parts. So they operate smoothly. Compared with common horizontal pump, KCW series can decrease 30 percent floor space. The shaft seal is made with hard alloy mechanical seal whose working life is long. Besides, the pump features low noise, convenient maintenance and light shake.

► 用途 Applications

- 适用于工业、城市给水、高层建筑供水 Water supply in industry, cities and high-rises;
- 消防管道增压 Fire fighting pipeline pressurizing;
- 冷暖空调冷热水循环 Cold and hot water circulation in air-condition;
- 远距离输水 Transport water from far away;
- 生产工艺循环增压输送, 并适用于各种给排水设备、锅炉等设备的配套使用 Pressurizing transport in industrial circulating system, and all kinds of water supply equipments, boiler etc.

► 工作条件 Operating Conditions


- 流量范围 Capacity range: 2~1800m³/h;
- 系统最高工作压力 System Max. working pressure: ≤ 1.6MPa;
- 环境温度 Ambient temperature: T ≤ 40℃;
- 电机绝缘等级 Motor's class of insulation: B级或F级;
- 扬程范围 Head range: 5~150m;
- 介质温度 Liquid temperature: -15℃ < T < +105℃;
- 电机防护等级 Motor's degree of protection: IP54或IP44;

■ 注: 特殊温度及压力订货时应另行提出, 以便提供更为可靠之产品。

Note: Please elucidate when temperature and pressure are special, so that we can supply you credible products.

KCW型泵型号意义、压力温度图 Designation and Pressure-Temperature Drawing of KCW Pumps


型号意义 Designation

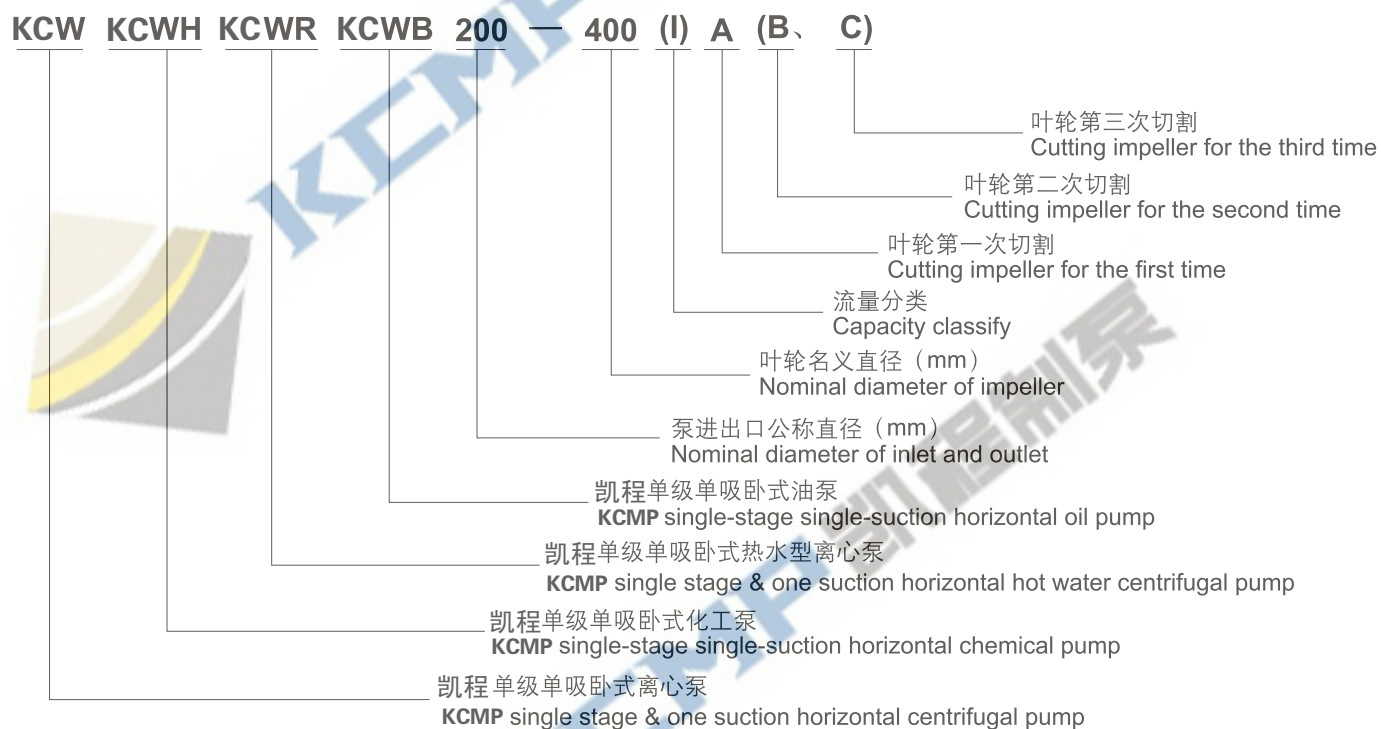

注: KCWH、KCWR、KCWB的性能参数、安装尺寸与KCW相同。

Note: performance parameters and installation dimensions of KCWH, KCWR and KCWB are the same as KCW.

压力温度图 Pressure-Temperature Drawing

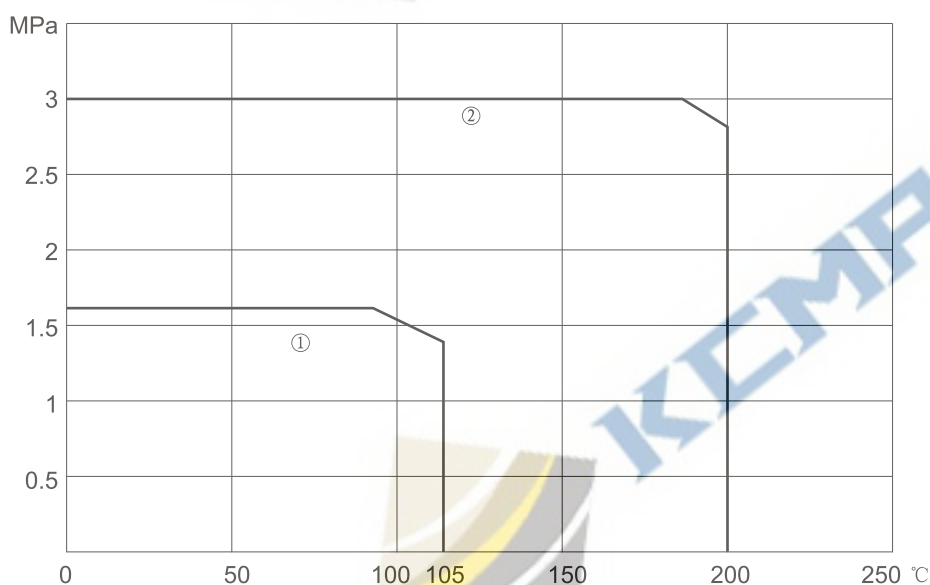


① 普通系统压力及温度
Pressure and temperature in an ordinary system.

② 特殊系统压力及温度
Press line and temperature in special system.

订货时需说明
Please elucidate in indent


KCW型泵型谱图 Hydraulic Coverage of KCW Pumps

型谱图 Hydraulic coverage

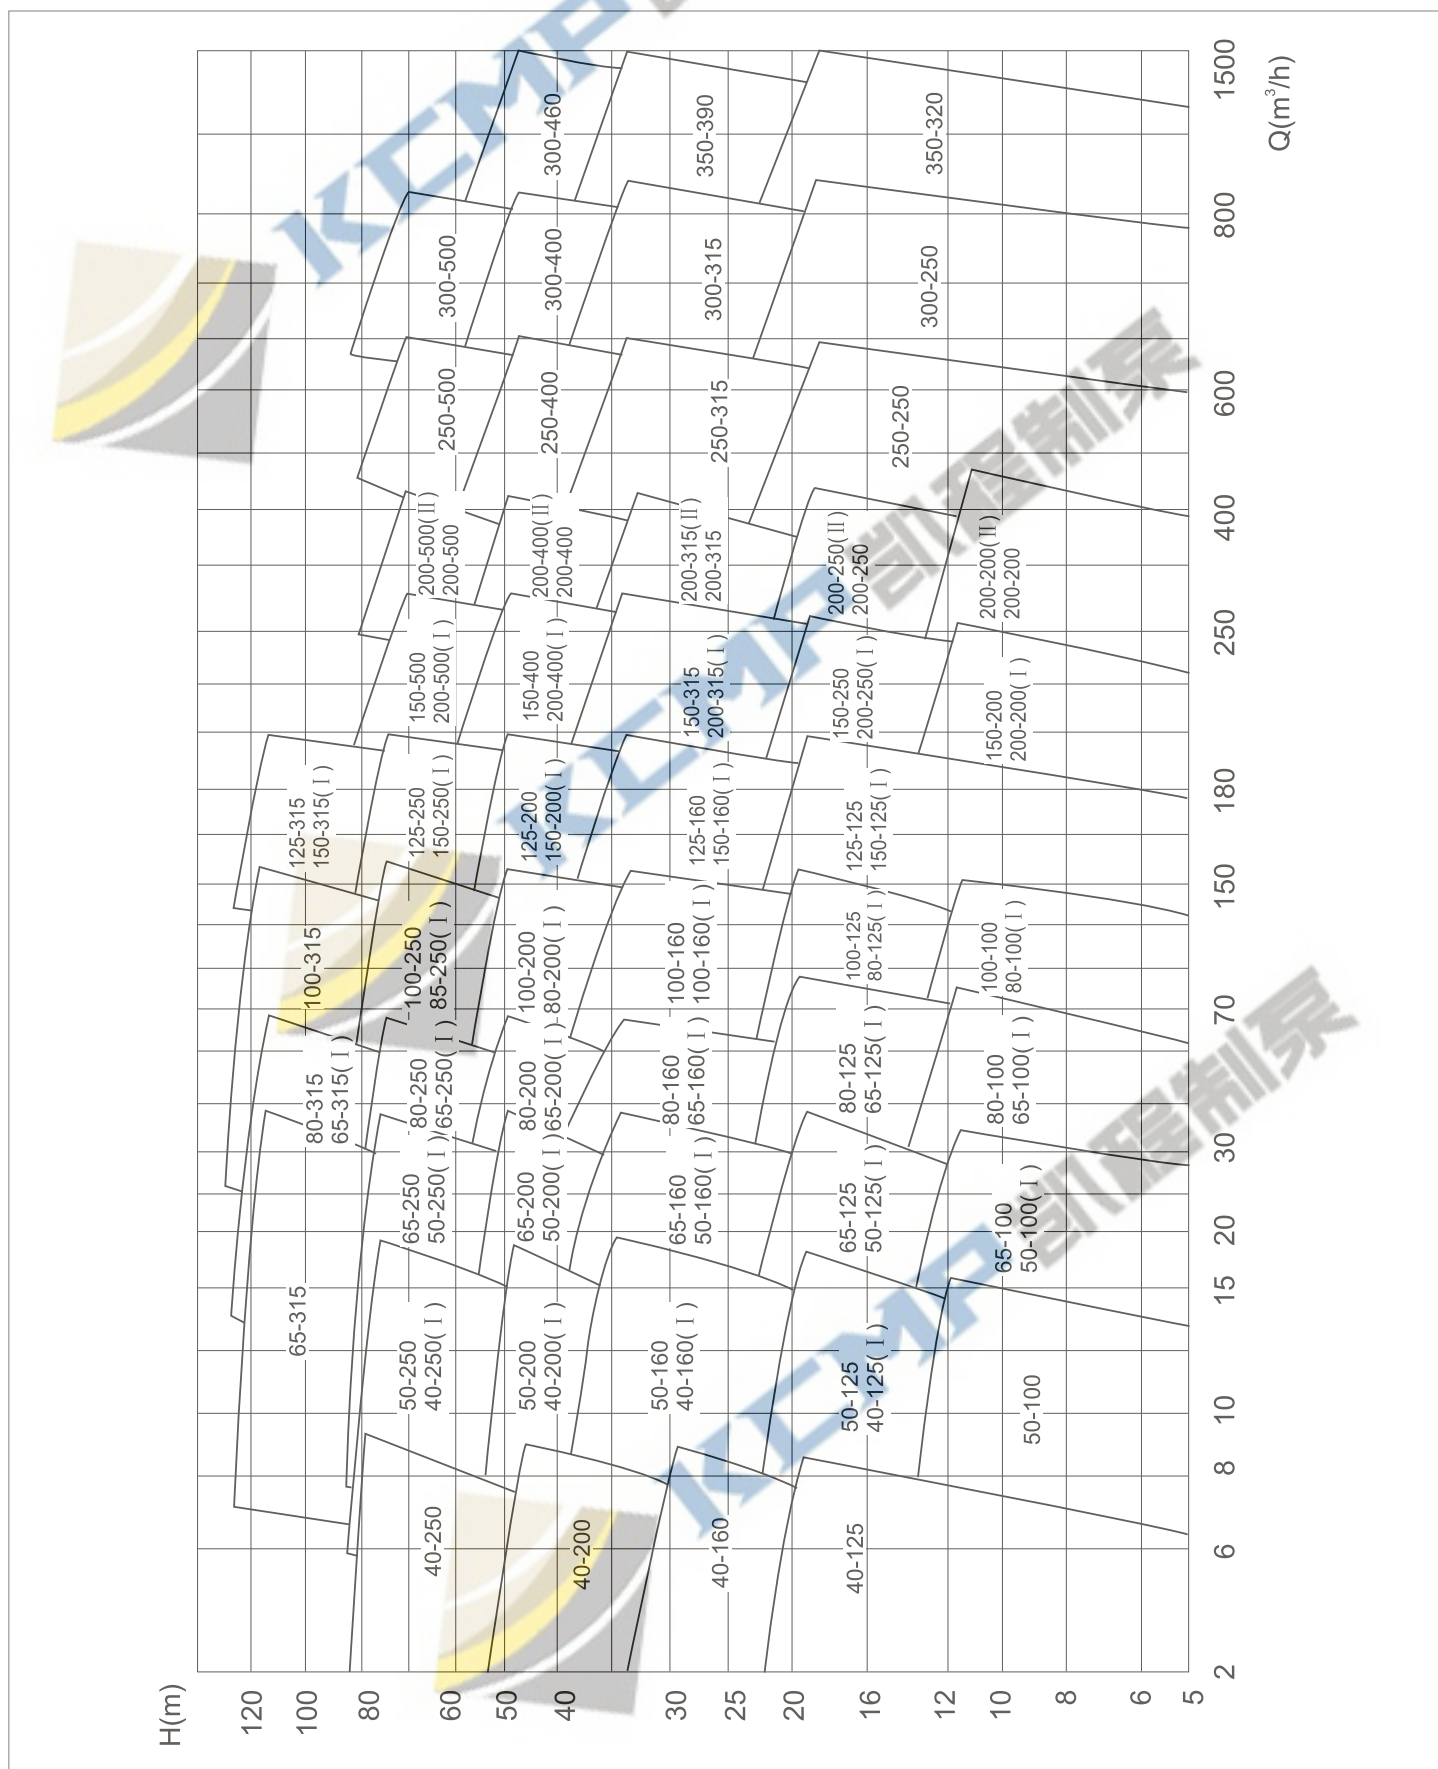

KCW型泵结构图 Structural Drawing of KCW Pumps

结构图 Structural Drawing of KCW Pumps

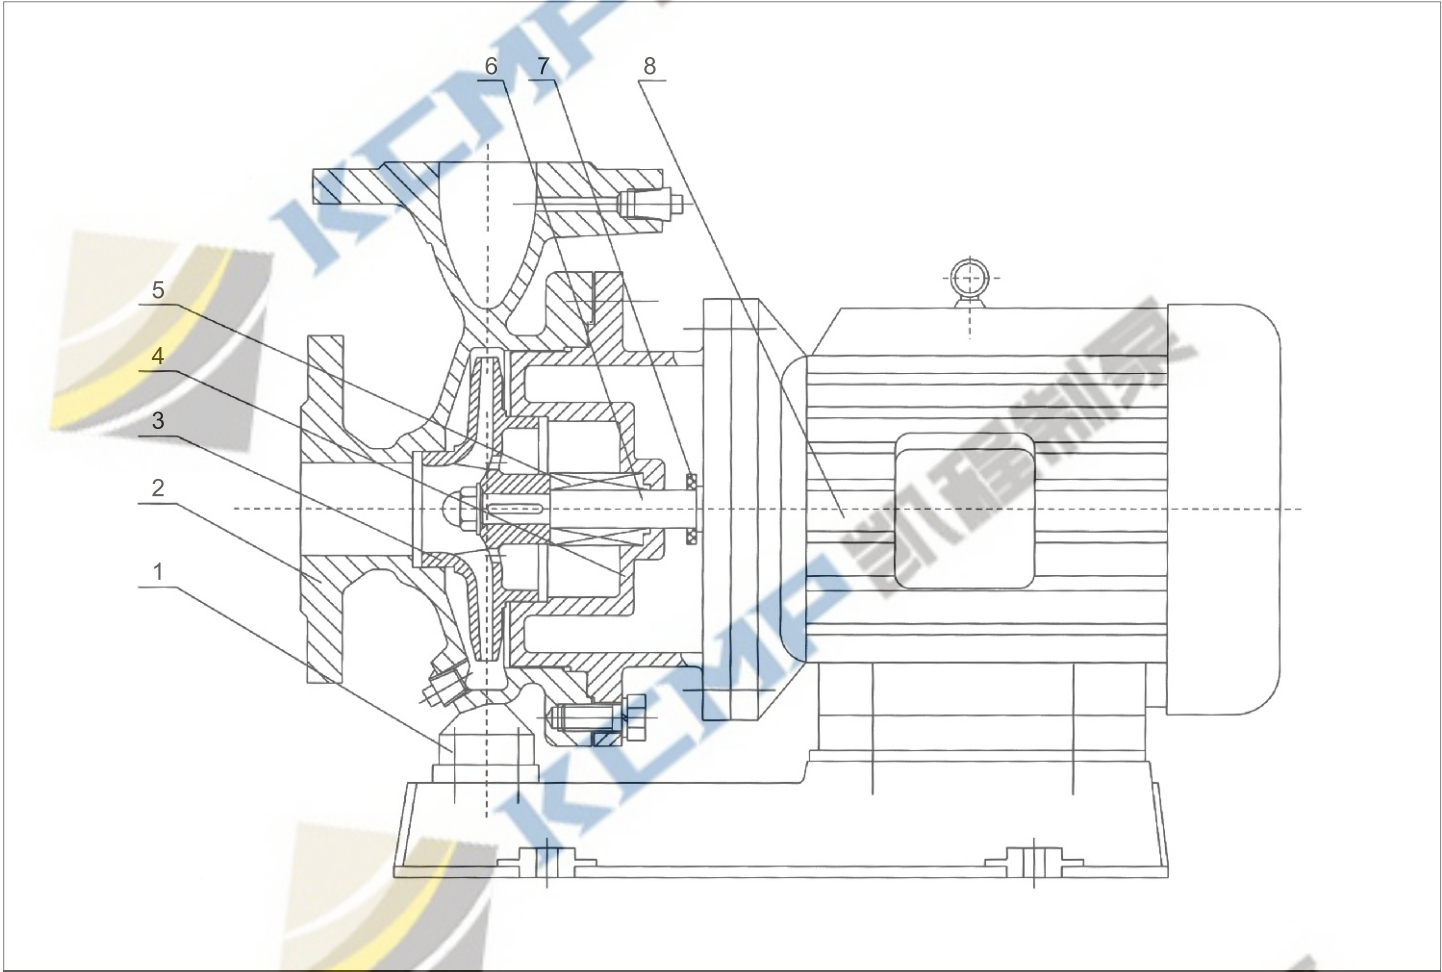

材料表 Materials Table

序号 No.	1	2	3	4	5	6	7	8
名称 Name	底板 Pedestal	泵体 Casing	叶轮 Impeller	泵盖 Pump cover	机械密封 Mechanical seal	主轴 Principal axis	挡水圈 Water-block ring	电机 Motor
材料 Material	HT200 焊接件 Weld parts	HT200 ZG25	HT200 ZCuSn10Zn	HT200 ZG25	碳化钨 Tungsten carbide	45、1Cr13	橡胶 Rubber	Y、Y2型
定制材料 Custom- material	ZG1Cr18Ni9Ti、ZG00Cr18Ni9、304、316				硬质合金 Hard alloy			YB型

※泵底座有钢板折边和铸铁两种，具体尺寸订货时说明

The base plate can be steel plate and cast iron and the exact dimension has to be offered.



>>> [Http://www.cnkcmp.com](http://www.cnkcmp.com) E-mail: kcmp@cnkcmp.com


KCW型泵性能参数表、安装尺寸图及安装尺寸表

Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of KCW Pumps

安装尺寸图 Installation Dimensions Drawing

※ 泵底座有钢板折边和铸铁两种，具体尺寸订货时说明

The base plate can be steel plate and cast iron and the exact dimension has to be offered.

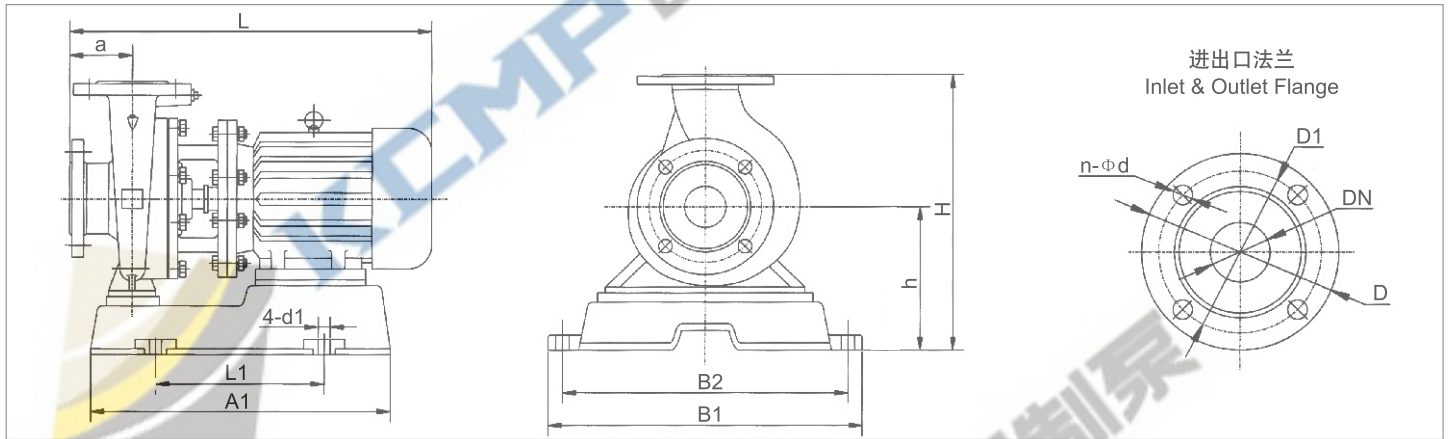

性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow		Head (m)	Efficiency %	$\frac{r}{min}$ speed	 Motor Power	(NPSH) _r (m) net positive suction head required	Weight (kg)	外形及安装尺寸 Outline and Installation Dimensions										进出口法兰尺寸 Inlet & Outlet Flange Dimensions				隔振器(垫) Vibration isolator
泵型号	m³/h	L/S	扬程	效率	转速	电机功率	必需汽蚀余量	重量	h	H	L	a	A1	B1	L1	B2	4-Φd1	D	D1	DN	n-Φd	规格Spec	
40-250(I)	8.8 12.5 16.3	2.44 3.47 4.53	81.2 80 77.5	31 38 40	2900	11	2.3	145	280	500	790	65	560	340	510	240	4-Φ18	Φ150	Φ110	40	4-Φ18	JG2-1	
40-250(I)A	8.2 11.6 15.2	2.28 3.22 4.22	71.0 70 68	38	2900	7.5	2.3	95	260	480	660	65	470	320	420	220	4-Φ14	Φ150	Φ110	40	4-Φ18	SD61-0.5	
40-250(I)B	7.6 10.8 14	2.11 3.0 3.89	61.4 60 58	37	2900	7.5	2.3	94	260	480	660	65	470	320	420	220	4-Φ14	Φ150	Φ110	40	4-Φ18	SD61-0.5	
40-250(I)C	7.1 10.0 13.1	1.97 2.78 3.64	53.2 52 50.4	36	2900	5.5	2.3	88	260	480	660	65	440	320	390	220	4-Φ14	Φ150	Φ110	40	4-Φ18	SD61-0.5	
50-100	8.8 12.5 16.3	2.44 3.47 4.53	13.6 12.5 11.3	55 62 60	2900	1.1	2.3	36	180	330	465	55	320	200	270	100	4-Φ14	Φ165	Φ125	40	4-Φ18	SD61-0.5	
50-100A	8 11 14.5	2.22 3.05 4.03	11 10 9	60	2900	0.75	2.3	35	180	330	465	55	320	200	270	100	4-Φ14	Φ165	Φ125	40	4-Φ18	SD61-0.5	
50-125	8.8 12.5 16.3	2.44 3.47 4.53	21.5 20 17.8	49 58 57	2900	1.5	2.3	43	190	340	475	55	330	200	280	100	4-Φ14	Φ165	Φ125	40	4-Φ18	SD61-0.5	
50-125A	8 11 14.5	2.22 3.05 4.03	17 16 14	57	2900	1.1	2.3	38	190	340	460	55	330	200	280	100	4-Φ14	Φ165	Φ125	40	4-Φ18	SD61-0.5	
50-160	8.8 12.5 16.3	2.44 3.47 4.53	33 32 30	45 52 51	2900	3	2.3	59	210	370	560	55	400	250	350	150	4-Φ14	Φ165	Φ125	40	4-Φ18	SD61-0.5	
50-160A	8.2 11.7 15.2	2.28 3.25 4.22	29 28 26	44 51 50	2900	2.2	2.3	51	210	370	525	55	380	250	330	150	4-Φ14	Φ165	Φ125	40	4-Φ18	SD61-0.5	
50-160B	7.3 10.4 13.5	2.38 2.89 3.75	23 22 20.5	50	2900	1.5	2.3	47	210	370	500	55	350	250	300	150	4-Φ14	Φ165	Φ125	40	4-Φ18	SD61-0.5	
50-200	8.8 12.5 16.3	2.44 3.47 4.53	52 50 48	38 46 46	2900	5.5	2.3	101	240	420	645	55	440	290	390	190	4-Φ14	Φ165	Φ125	40	4-Φ18	SD61-0.5	
50-200A	8.3 11.7 15.3	2.31 3.25 4.25	45.8 44 42	37 45 45	2900	4	2.3	80	240	420	580	55	410	290	360	190	4-Φ14	Φ165	Φ125	40	4-Φ18	SD61-0.5	
50-200B	7.5 10.6 13.8	2.08 2.94 3.83	37 36 34	44	2900	3	2.3	68	240	420	560	55	400	290	350	190	4-Φ14	Φ165	Φ125	40	4-Φ18	SD61-0.5	
50-250	8.8 12.5 16.3	2.44 3.47 4.53	82 80 77.5	29 38 40	2900	11	2.3	160	280	500	790	65	560	340	510	240	4-Φ18	Φ165	Φ125	40	4-Φ18	JG2-1	
50-250A	8.2 11.6 15.2	2.28 3.22 4.22	71.5 70 68	38	2900	7.5	2.3	115	260	480	660	65	470	320	420	220	4-Φ14	Φ165	Φ125	40	4-Φ18	SD61-0.5	
50-250B	7.6 10.8 14	2.11 3.0 3.89	61.4 60 58	37	2900	7.5	2.3	114	260	480	660	65	470	320	420	220	4-Φ14	Φ165	Φ125	40	4-Φ18	SD61-0.5	
50-250C	7.1 10.0 13.1	1.97 2.78 3.64	53.2 52 50.4	36	2900	5.5	2.3	108	260	480	660	65	440	320	390	220	4-Φ14	Φ165	Φ125	40	4-Φ18	SD61-0.5	


KCW型泵性能参数表、安装尺寸图及安装尺寸表

Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of KCW Pumps

安装尺寸图 Installation Dimensions Drawing

※ 泵底座有钢板折边和铸铁两种，具体尺寸订货时说明

The base plate can be steel plate and cast iron and the exact dimension has to be offered.

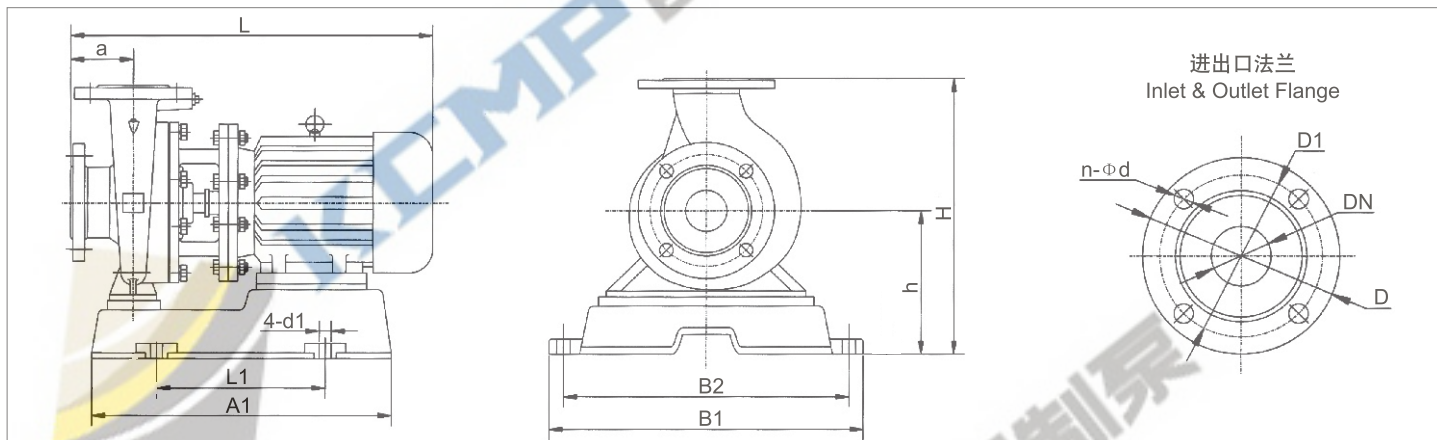

性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table


Type	流量Q Flow		Head (m)	Efficiency %	r/min speed	Motor Power kW	(NPSH) r (m) net positive suction head required	Weight (kg)	外形及安装尺寸 Outline and Installation Dimensions										进出口法兰尺寸 Inlet & Outlet Flange Dimensions				隔振器(垫) Vibration Isolator
泵型号	m³/h	L/S	扬程	效率	转速	电机功率	必需汽蚀余量	重量	h	H	L	a	A1	B1	L1	B2	4-Φd1	D	D1	DN	n-Φd	规格Spec	
50-100(I)	17.5 25 32.5	4.86 6.94 9.03	13.7 12.5 10.5	67 69 69	2900	1.5	2.5	41	190	350	480	55	340	200	290	100	4-Φ 14	Φ 165	Φ 125	40	4-Φ 18	SD61-0.5	
50-100(I)A	15.6 22.3 29	4.3 6.19 8.1	11 10 8.4	65 67 68	2900	1.1	2.5	36	190	350	465	55	330	200	280	100	4-Φ 14	Φ 165	Φ 125	40	4-Φ 18	SD61-0.5	
50-125(I)	17.5 25 32.5	4.86 6.94 9.03	21.5 20 18	60 68 67	2900	3	2.5	56	190	360	565	55	400	220	350	120	4-Φ 14	Φ 165	Φ 125	40	4-Φ 18	SD61-0.5	
50-125(I)A	15.6 22.3 29	4.33 6.19 8.1	17 16 13.6	58 66 65	2900	2.2	2.5	48	190	360	530	55	370	220	320	120	4-Φ 14	Φ 165	Φ 125	40	4-Φ 18	SD61-0.5	
50-160(I)	17.5 25 32.5	4.68 6.94 9.03	34.4 32 27.5	54 63 60	2900	4	2.5	72	210	395	580	55	410	260	360	160	4-Φ 14	Φ 165	Φ 125	40	4-Φ 18	SD61-0.5	
50-160(I)A	16.4 23.4 30.4	4.56 6.5 8.44	30 28 24	54 62 59	2900	4	2.5	71	210	395	580	55	400	250	350	150	4-Φ 14	Φ 165	Φ 125	40	4-Φ 18	SD61-0.5	
50-160(I)B	15.0 21.6 28	4.17 6.0 7.78	26 24 20.6	58	2900	3	2.5	59	210	395	550	55	380	250	330	150	4-Φ 14	Φ 165	Φ 125	40	4-Φ 18	SD61-0.5	
50-200(I)	17.5 25 32.5	4.86 6.94 9.03	52.7 50 45.5	49 58 59	2900	7.5	2.5	108	245	430	645	70	440	290	390	190	4-Φ 14	Φ 165	Φ 125	40	4-Φ 18	SD61-0.5	
50-200(I)A	16.4 23.5 30.5	4.56 6.53 8.47	46.4 44 40	48 57 58	2900	7.5	2.5	107	245	430	645	70	440	290	390	190	4-Φ 14	Φ 165	Φ 125	40	4-Φ 18	SD61-0.5	
50-200(I)B	15.2 21.8 28.3	4.22 6.06 7.86	40 38.3 4.5	55	2900	5.5	2.5	100	245	430	645	70	410	280	360	180	4-Φ 14	Φ 165	Φ 125	40	4-Φ 18	SD61-0.5	
50-250(I)	17.5 25 32.5	4.86 6.94 9.03	82 80 76.5	39 50 52	2900	15	2.5	175	280	520	800	65	560	330	510	230	4-Φ 18	Φ 165	Φ 125	40	4-Φ 18	JG2-1	
50-250(I)A	16.4 23.4 30.5	4.56 6.5 8.47	71.5 70 67	39 50 52	2900	11	2.5	165	280	520	800	65	560	330	510	230	4-Φ 18	Φ 165	Φ 125	40	4-Φ 18	JG2-1	
50-250(I)B	15 21.6 28	4.17 6.0 7.78	61 60 57.4	38 49 54	2900	11	2.5	165	260	500	800	65	470	330	420	230	4-Φ 14	Φ 165	Φ 125	40	4-Φ 18	JG2-1	
50-315(I)	17.5 25 32.5	4.86 6.94 9.03	128 125 122	30 40 44	2900	30	2.5	310	300	570	930	100	700	390	620	290	4-Φ 20	Φ 165	Φ 125	40	4-Φ 18	JG2-2	
50-315(I)A	16.6 23.7 31	4.61 6.58 8.6	115 113 110	30 40 44	2900	30	2.5	245	300	570	865	85	620	360	570	260	4-Φ 18	Φ 165	Φ 125	40	4-Φ 18	JG2-2	
50-315(I)B	15.7 22.5 29.2	4.36 6.25 8.0	103 101 98	39	2900	22	2.5	215	300	570	840	85	620	360	570	260	4-Φ 18	Φ 165	Φ 125	40	4-Φ 18	JG2-2	
50-315(I)C	14.4 20.6 26.8	4.0 5.72 7.44	86 85 83	38	2900	15	2.5	195	300	570	795	85	570	360	520	260	4-Φ 18	Φ 165	Φ 125	40	4-Φ 18	JG2-2	
65-100	17.5 25 32.5	4.86 6.94 9.03	13.7 12.5 10.5	67 69 69	2900	1.5	2.5	46	190	350	480	55	340	200	350	100	4-Φ 14	Φ 185	Φ 145	40	4-Φ 18	SD41-0.5	

KCW型泵性能参数表、安装尺寸图及安装尺寸表

安装尺寸图 Installation Dimensions Drawing

※ 泵底座有钢板折边和铸铁两种，具体尺寸订货时说明

The base plate can be steel plate and cast iron and the exact dimension has to be offered.

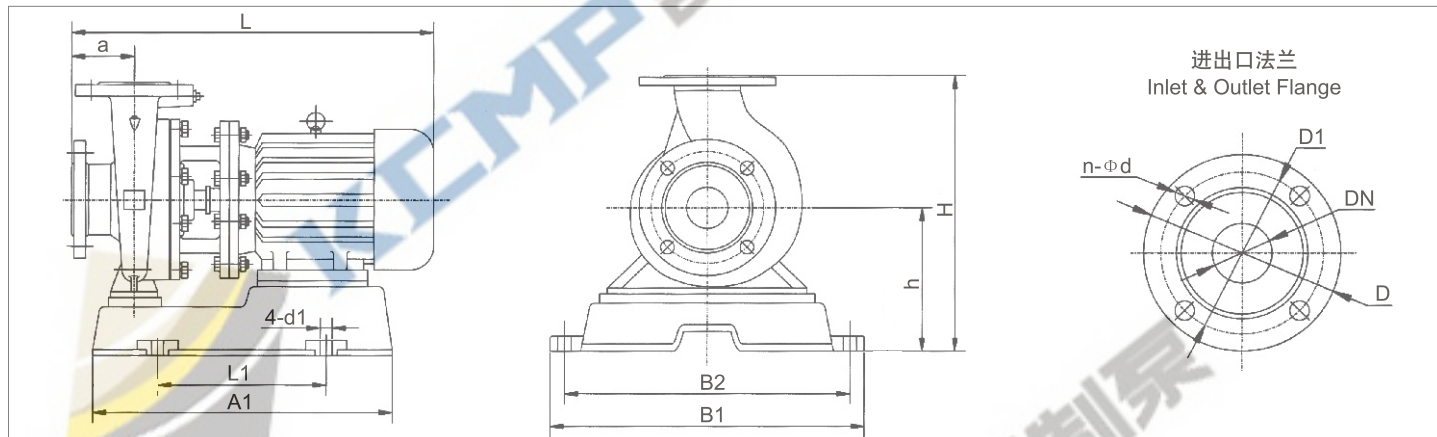

性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	Flow 流量Q		Head (m)	Efficiency %	speed r/min	Motor Power kW	(NPSH) r (m)	Weight (kg)	外形及安装尺寸 Outline and Installation Dimensions									进出口法兰尺寸 Inlet & Outlet Flange Dimensions				隔振器(垫) Vibration Isolator
泵型号	m³/h	L/S	扬程	效率	转速	电机功率	必需汽蚀余量	重量	h	H	L	a	A1	B1	L1	B2	4-Φd1	D	D1	DN	n-Φd	规格Spec
65-100A	15.6 22.3 29	4.3 6.19 8.1	11 10 8.4	65 67 68	2900	1.1	2.5	41	190	350	465	55	330	200	280	100	4-Φ14	Φ185	Φ145	40	4-Φ18	SD41-0.5
65-125	17.5 25 32.5	4.86 6.94 9.03	21.5 20 18	60 68 67	2900	3	2.5	58	190	360	560	55	400	220	350	120	4-Φ14	Φ185	Φ145	40	4-Φ18	SD61-0.5
65-125A	15.6 22.3 29	4.33 6.19 8.1	17 16 14.4	58 66 65	2900	2.2	2.5	49	190	360	525	55	370	220	340	120	4-Φ14	Φ185	Φ145	40	4-Φ18	SD61-0.5
65-160	17.5 25 32.5	4.86 6.94 9.03	34.4 32 27.5	54 63 60	2900	4	2.5	75	210	395	580	55	410	260	360	160	4-Φ14	Φ185	Φ145	40	4-Φ18	SD61-0.5
65-160A	16.4 23.4 30.4	4.56 6.5 8.44	30 28 24	54 62 59	2900	4	2.5	75	210	395	580	55	400	250	350	150	4-Φ14	Φ185	Φ145	40	4-Φ18	SD61-0.5
65-160B	15.0 21.6 28	4.17 6.0 7.78	26 24 20.6	58 58 58	2900	3	2.5	63	210	395	560	55	380	250	330	150	4-Φ14	Φ185	Φ145	40	4-Φ18	SD61-0.5
65-200	17.5 25 32.5	4.86 6.94 9.03	52.7 50 45.5	49 57 59	2900	7.5	2.5	107	245	430	645	70	440	290	390	190	4-Φ14	Φ185	Φ145	40	4-Φ18	SD61-0.5
65-200A	16.4 23.5 30.5	4.56 6.53 8.47	46.4 44 40	48 57 58	2900	7.5	2.5	107	245	430	645	70	440	290	390	190	4-Φ14	Φ185	Φ145	40	4-Φ18	SD61-0.5
65-200B	15.2 21.8 28.3	4.22 6.06 7.86	40 38 34.5	55 55 55	2900	5.5	2.5	100	245	430	645	70	410	280	360	180	4-Φ14	Φ185	Φ145	40	4-Φ18	SD61-0.5
65-250	17.5 25 32.5	4.86 6.94 9.03	82 80 76.5	39 50 52	2900	15	2.5	180	280	520	795	65	560	330	510	230	4-Φ18	Φ185	Φ145	40	4-Φ18	JG2-1
65-250A	16.4 23.4 30.5	4.56 6.5 8.47	71.5 70 67	39 50 52	2900	11	2.5	170	280	520	795	65	560	330	510	230	4-Φ18	Φ185	Φ145	40	4-Φ18	JG2-1
65-250B	15 21.6 28	4.17 6.0 7.78	61 60 57.4	38 49 54	2900	11	2.5	170	260	500	795	65	470	330	420	230	4-Φ14	Φ185	Φ145	40	4-Φ18	JG2-1
65-315	17.5 25 32.5	4.86 6.94 9.03	127 125 122	32 40 44	2900	30	2.5	320	300	570	930	100	700	390	620	290	4-Φ20	Φ185	Φ145	40	4-Φ18	JG2-2
65-315A	16.6 23.7 31	4.61 6.58 8.6	115 113 110	32 40 44	2900	22	2.5	255	300	570	865	85	620	360	570	260	4-Φ18	Φ185	Φ145	40	4-Φ18	JG2-2
65-315B	15.7 22.5 29.2	4.36 6.25 8.0	103 101 98	39 39 39	2900	18.5	2.5	225	300	570	840	85	620	360	570	260	4-Φ18	Φ185	Φ145	40	4-Φ18	JG2-2
65-315C	14.4 20.6 26.8	4.0 5.72 7.44	86 85 83	38 38 38	2900	15	2.5	205	300	570	795	85	570	360	520	260	4-Φ18	Φ185	Φ145	40	4-Φ18	JG2-2
65-100(I)	35 50 65	9.72 13.9 18.1	13.8 12.5 10	67 73 70	2900	3	3.0	63	210	370	565	75	390	250	340	150	4-Φ14	Φ185	Φ145	40	4-Φ18	SD61-0.5
65-100(I)A	31.3 44.7 58	8.7 12.4 16.1	11 10 8	66 72 69	2900	2.2	3.0	53	210	370	530	75	370	250	320	150	4-Φ14	Φ185	Φ145	40	4-Φ18	SD61-0.5


KCW型泵性能参数表、安装尺寸图及安装尺寸表

Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of KCW Pumps

安装尺寸图 Installation Dimensions Drawing

※ 泵底座有钢板折边和铸铁两种，具体尺寸订货时说明

The base plate can be steel plate and cast iron and the exact dimension has to be offered.

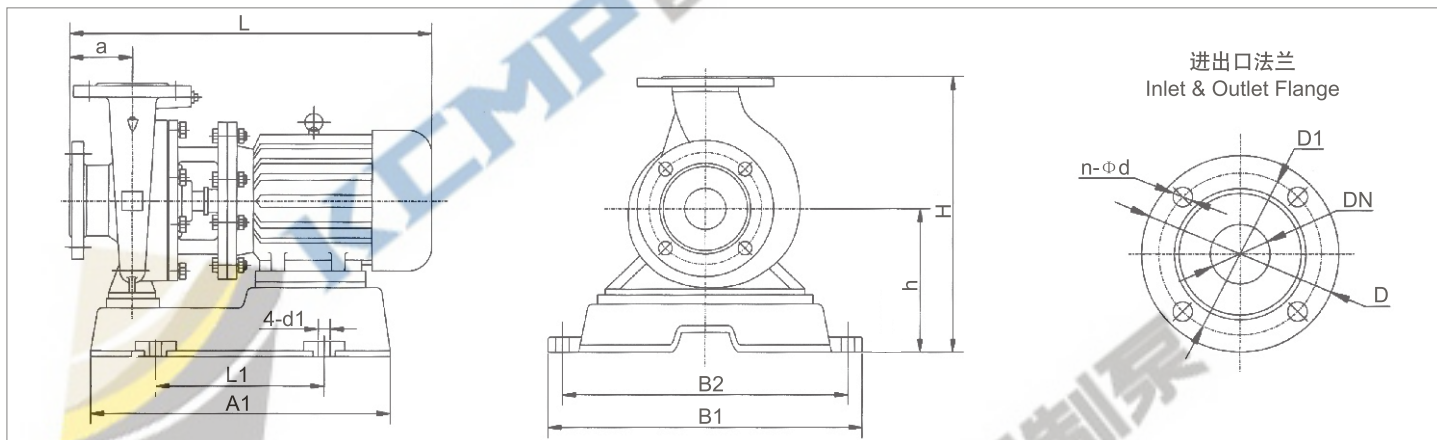

性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow		Head (m)	Efficiency %	r/min speed	Motor Power	(NPSH) r (m) net positive suction head required	Weight (kg)	外形及安装尺寸 Outline and Installation Dimensions								进出口法兰尺寸 Inlet & Outlet Flange Dimensions				隔振器(垫) Vibration isolator	
泵型号	m³/h	L/S	扬程	效率	转速	电机功率	必需汽蚀余量	重量	h	H	L	a	A1	B1	L1	B2	4-Φd1	D	D1	DN	n-Φd	规格Spec
65-125(I)	35 50 65	9.72 13.9 18.1	22 20 17	67 72.5 70	2900	5.5	3.0	99	215	400	660	65	450	280	400	180	4-Φ14	Φ185	Φ145	40	4-Φ18	SD60-0.5
65-125(I)A	31.3 45 58	8.7 12.5 16.1	17.5 16 13.6	66 71 69	2900	4	3.0	78	215	400	959	65	420	260	370	160	4-Φ14	Φ185	Φ145	40	4-Φ18	SD60-0.5
65-160(I)	35 50 65	9.72 13.9 18.1	35 32 28	63 71 70	2900	7.5	3.0	103	240	440	655	80	440	290	390	190	4-Φ14	Φ185	Φ145	40	4-Φ18	SD60-0.5
65-160(I)A	32.7 46.7 61	9.1 13.0 16.9	30.6 28 24	62 70 69	2900	7.5	3.0	103	240	440	655	80	440	290	390	190	4-Φ14	Φ185	Φ145	40	4-Φ18	SD60-0.5
65-160(I)B	30.3 43.3 56.3	8.4 12.0 15.6	26 24 21	69	2900	5.5	3.0	97	240	440	655	80	410	280	360	180	4-Φ14	Φ185	Φ145	40	4-Φ18	SD60-0.5
65-200(I)	35 50 65	9.72 13.9 18.1	53.5 50 46	55 67 68	2900	15	3.0	176	300	470	795	75	560	330	510	230	4-Φ18	Φ185	Φ145	40	4-Φ18	JG2-1
65-200(I)A	32.8 47 61	9.1 13.1 16.9	47 44 40	54 66 67	2900	11	3.0	166	300	470	795	75	560	330	510	230	4-Φ18	Φ185	Φ145	40	4-Φ18	JG2-1
65-200(I)B	30.5 43.5 56.6	8.5 12.1 15.7	40.6 38 33.4	65	2900	7.5	3.0	114	280	450	665	75	470	290	420	190	4-Φ14	Φ185	Φ145	40	4-Φ18	JG2-1
65-250(I)	35 50 65	9.72 13.9 18.1	83 80 72	52 59 60	2900	22	3.0	235	280	520	870	85	620	360	570	260	4-Φ18	Φ185	Φ145	40	4-Φ18	JG2-2
65-250(I)A	32.5 46.7 61	9.0 13.0 16.9	73 70 63	52 59 60	2900	18.5	3.0	205	280	520	850	85	620	340	570	240	4-Φ18	Φ185	Φ145	40	4-Φ18	JG2-2
65-250(I)B	30 43.3 56	8.3 12.0 15.6	62 60 54	58	2900	15	3.0	180	280	520	805	85	570	330	520	230	4-Φ18	Φ185	Φ145	40	4-Φ18	JG2-2
65-315(I)	35 50 65	9.72 13.9 18.1	128 125 121	44 54 57	2900	37	3.0	350	325	620	995	85	700	400	650	300	4-Φ18	Φ185	Φ145	40	4-Φ18	JG2-2
65-315(I)A	32.5 46.5 60.5	9.0 12.9 16.8	112.6 110 106.4	43 54 57	2900	30	3.0	335	325	620	995	85	700	400	650	300	4-Φ18	Φ185	Φ145	40	4-Φ18	JG2-2
65-315(I)B	31 44.5 58	8.6 12.4 16.1	102.5 100 98	53	2900	30	3.0	335	325	620	995	85	700	400	650	300	4-Φ18	Φ185	Φ145	40	4-Φ18	JG2-2
65-315(I)C	29 41 53.6	8.1 11.4 14.9	87 85 83	51	2900	22	3.0	270	325	620	890	85	620	380	570	280	4-Φ18	Φ185	Φ145	40	4-Φ18	JG2-2
80-100	35 50 65	9.72 13.9 18.1	13.8 12.5 10	67 73 70	2900	3	3.0	63	210	410	570	75	390	250	340	150	4-Φ14	Φ200	Φ160	40	8-Φ18	SD60-0.5
80-100A	31.3 44.7 58	8.7 12.5 16.1	11 10 8	66 72 69	2900	2.2	3.0	54	210	410	535	75	370	250	320	150	4-Φ14	Φ200	Φ160	40	8-Φ18	SD60-0.5
80-125	35 50 65	9.72 13.9 18.1	22 20 17	67 72.5 70	2900	5.5	3.0	99	215	400	660	65	450	280	400	180	4-Φ14	Φ200	Φ160	40	8-Φ18	SD60-0.5


KCW型泵性能参数表、安装尺寸图及安装尺寸表

Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of KCW Pumps

安装尺寸图 Installation Dimensions Drawing

※ 泵底座有钢板折边和铸铁两种，具体尺寸订货时说明

The base plate can be steel plate and cast iron and the exact dimension has to be offered.

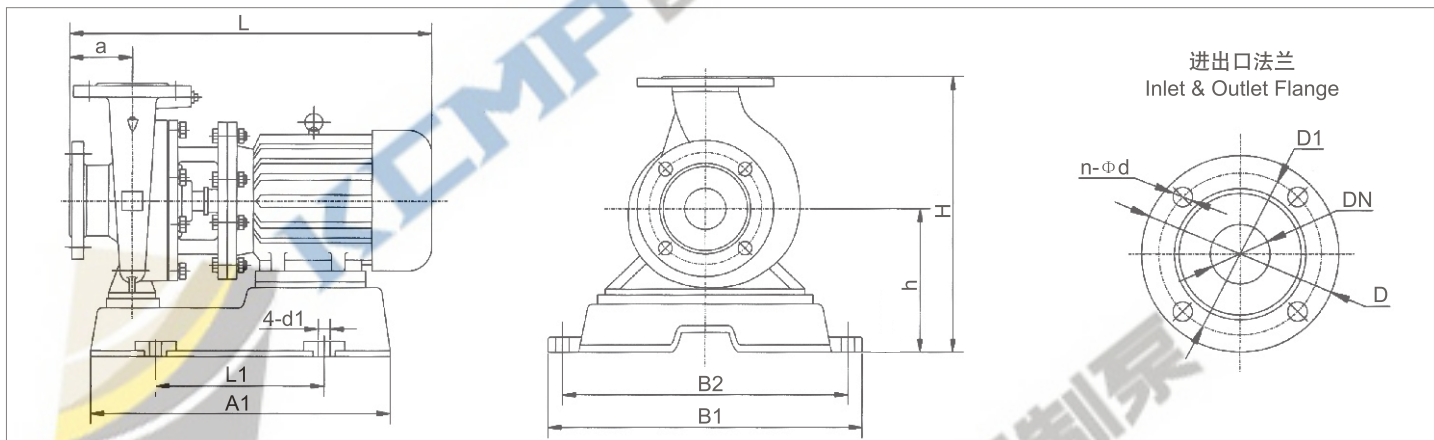


性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow		Head (m)	Efficiency %	r/min speed	Motor Power kW	(NPSH) _r (m) net positive suction head required	Weight (kg)	外形及安装尺寸 Outline and Installation Dimensions										进出口法兰尺寸 Inlet & Outlet Flange Dimensions				隔振器(垫) Vibration isolator
泵型号	m³/h	L/S	扬程	效率	转速	电机功率	必需汽蚀余量	重量	h	H	L	a	A1	B1	L1	B2	4-Φd1	D	D1	DN	n-Φd	规格Spec	
80-125A	31.3 45 58	8.7 12.5 16.1	17.5 16 13.6	66 71 69	2900	4	3.0	79	215	400	595	65	420	260	370	160	4-φ14	φ200	φ160	40	8-φ18	SD60-0.5	
80-160	35 5 065	9.72 13.9 18.1	35 32 28	63 71 70	2900	7.5	3.0	105	240	440	655	80	440	290	390	190	4-φ14	φ200	φ160	40	8-φ18	SD60-0.5	
80-160A	32.7 46.7 61	9.1 13.0 16.9	30.6 28 24	62 70 69	2900	7.5	3.0	105	240	440	655	80	440	290	390	190	4-φ14	φ200	φ160	40	8-φ18	SD60-0.5	
80-160B	30.3 43.3 56.3	8.4 12.0 15.6	26 24 21	69	2900	5.5	3.0	98	240	440	655	80	410	280	360	180	4-φ14	φ200	φ160	40	8-φ18	SD60-0.5	
80-200	35 50 65	9.72 13.9 18.1	53.5 50 46	55 67 68	2900	15	3.0	175	300	470	795	75	560	330	510	230	4-φ18	φ200	φ160	40	8-φ18	JG2-1	
80-200A	32. 47 61	9.1 13.1 16.9	47 44 40	54 66 67	2900	11	3.0	165	300	470	795	75	560	330	510	230	4-φ18	φ200	φ160	40	8-φ18	JG2-1	
80-200B	30.5 43.5 56.6	8.5 12.1 15.7	40.6 38 33.4	65	2900	7.5	3.0	115	280	450	665	75	470	290	420	190	4-φ14	φ200	φ160	40	8-φ18	JG2-1	
80-250	35 5 065	9.72 13.9 18.1	83 80 72	52 59 60	2900	22	3.0	240	280	520	870	85	620	360	570	260	4-φ18	φ200	φ160	40	8-φ18	JG2-2	
80-250A	32.5 46. 761	9.0 13.0 16.9	73 70 63	52 59 60	2900	18.5	3.0	210	280	520	850	85	620	340	570	240	4-φ18	φ200	φ160	40	8-φ18	JG2-2	
80-250B	30 43.3 56	8.3 12.0 15.6	62 60 54	58	2900	15	3.0	185	280	520	805	85	570	330	520	230	4-φ18	φ200	φ160	40	8-φ18	JG2-2	
80-315	35 50 65	9.72 13.9 18.1	128 125 122	43 54 57	2900	37	3.0	355	325	620	995	85	700	400	650	300	4-φ18	φ200	φ160	40	8-φ18	JG2-2	
80-315A	32.5 46.5 60.5	9.0 12.9 16.8	112.6 110 107.4	43 54 57	2900	30	3.0	340	325	620	995	85	700	400	650	300	4-φ18	φ200	φ160	40	8-φ18	JG2-2	
80-315B	31 44.5 58	8.6 12.4 16.1	102.5 100 98	53	2900	30	3.0	340	325	620	995	85	700	400	650	300	4-φ18	φ200	φ160	40	8-φ18	JG2-2	
80-315C	29 41 53.6	8.1 11.4 14.9	98 85 83	51	2900	22	3.0	275	325	620	880	85	620	380	570	280	4-φ18	φ200	φ160	40	8-φ18	JG2-2	
80-350	35 50 65	9.72 13.9 18.1	146 150 142	55 66 67	2900	55	3.0	570	325	650	1250	90	830	500	750	300	4-φ22	φ200	φ160	40	8-φ18	JG3-1	
80-350A	31 44.5 58	8.6 12.4 16.1	138.4 142 134.8	65	2900	45	3.0	470	325	650	1100	90	750	450	670	250	4-φ20	φ200	φ160	40	8-φ18	JG3-1	
80-350B	29 41 53.6	8.1 11.4 14.9	131.4 135 127.8	63	2900	37	3.0	440	325	650	1100	90	730	400	650	200	4-φ20	φ200	φ160	40	8-φ18	JG3-1	
80-100(I)	70 100 130	19.4 27.8 36.1	13.6 12.5 11	66 76 75	2900	5.5	4.5	108	235	465	670	65	470	290	420	190	4-φ14	φ200	φ160	40	8-φ18	SD60-0.5	

※泵底座有钢板折边和铸铁两种, 具体尺寸订货时说明

The base plate can be steel plate and cast iron and the exact dimension has to be offered.

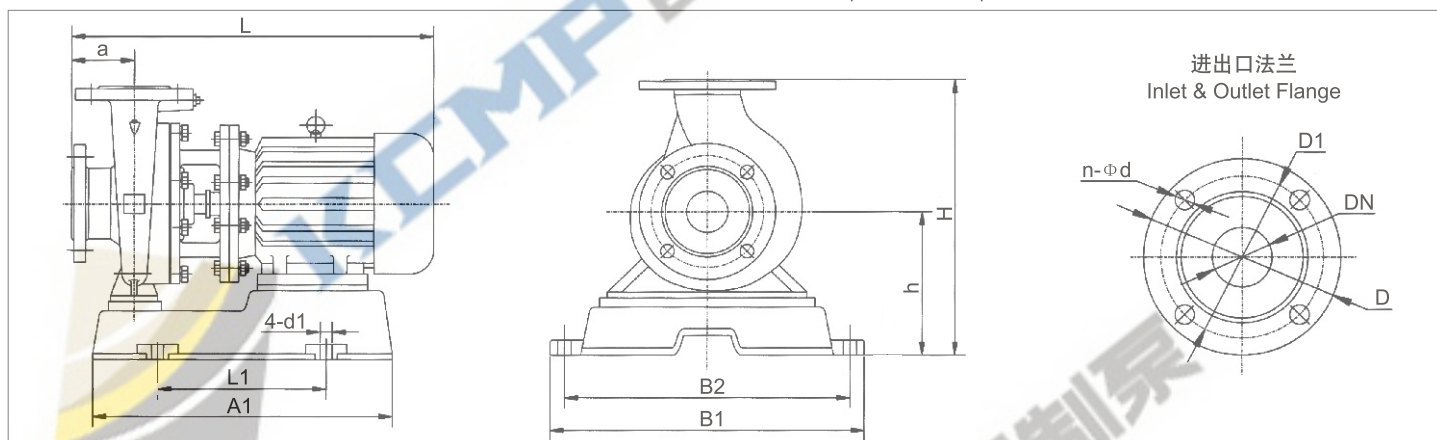

性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow		Head (m)	Efficiency η%	 r/min speed	 Motor Power	(NPSH)r (m) net positive suction head required	Weight (kg)	外形及安装尺寸 Outline and Installation Dimensions										进出口法兰尺寸 Inlet & Outlet Flange Dimensions				隔振器(垫) Vibration isolator
泵型号	m³/h	L/S	扬程	效率	转速	电机功率	必需汽蚀余量	重量	h	H	L	a	A1	B1	L1	B2	4-Φd1	D	D1	DN	n-Φd	规格Spec	
100-125	70 100 130	19.4 27.8 36.1	23.5 20 14	70 76 65	2900	11	4.5	169	260	480	795	65	560	330	510	230	4-Φ18	Φ220	Φ180	40	8-Φ18	JG2-1	
100-125A	62.6 89 116	17.4 24.7 32.2	19 16 11	68 74 63	2900	7.5	4.5	118	240	460	665	65	470	290	420	190	4-Φ14	Φ220	Φ180	40	8-Φ18	JG2-1	
100-160	70 100 130	19.4 27.8 36.1	36.5 32 24	70 76 65	2900	15	4.5	191	260	510	810	65	560	330	510	230	4-Φ18	Φ220	Φ180	40	8-Φ18	JG2-1	
100-160A	65.4 93.5 121.6	18.2 26.0 33.8	32 28 21	68 74 67	2900	11	4.5	181	260	510	810	65	560	330	510	230	4-Φ18	Φ220	Φ180	40	8-Φ18	JG2-1	
100-160B	60.6 86.6 112.5	16.8 24.1 31.3	27 24 18	64 72 63	2900	11	4.5	181	240	490	810	65	470	290	420	190	4-Φ14	Φ220	Φ180	40	8-Φ18	JG2-1	
100-200	70 100 130	19.4 27.8 36.1	54 50 42	65 74 73	2900	22	4.0	245	280	520	875	65	620	360	570	260	4-Φ18	Φ220	Φ180	40	8-Φ18	JG2-2	
100-200A	65.4 93.5 121.6	18.2 26.0 33.8	47.5 44 37	64 73 72	2900	18.5	4.0	215	280	520	855	65	620	340	570	240	4-Φ18	Φ220	Φ180	40	8-Φ18	JG2-1	
100-200B	61 87 113	16.9 24.2 31.4	41 38 32	71	2900	15	4.0	193	280	505	810	60	570	330	520	230	4-Φ14	Φ220	Φ180	40	8-Φ18	JG2-1	
100-250	70 100 130	19.4 27.8 36.1	87 80 68	62 69 68	2900	37	4.0	345	300	580	990	70	720	400	670	300	4-Φ20	Φ220	Φ180	40	8-Φ18	JG2-2	
100-250A	65.4 93.5 121.6	18.2 26.0 33.8	76 70 59.5	61 68 67	2900	30	4.0	330	300	580	990	70	720	400	670	300	4-Φ20	Φ220	Φ180	40	8-Φ18	JG2-2	
100-250B	61 87 113	16.9 24.2 31.4	65 60 51	66	2900	30	4.0	330	300	580	990	70	640	380	590	280	4-Φ18	Φ220	Φ180	40	8-Φ18	JG2-2	
100-315	70 100 130	19.4 27.8 36.1	132 125 114	55 66 67	2900	75	4.0	689	325	650	1205	90	900	560	820	360	4-Φ22	Φ220	Φ180	40	8-Φ18	JG3-1	
100-315A	66.5 95 123.6	18.5 26.4 34.3	119 113 103	65 66 67	2900	55	4.0	549	325	650	1135	90	820	500	740	300	4-Φ20	Φ220	Φ180	40	8-Φ18	JG3-1	
100-315B	63 90 117	17.5 25 32.5	106.6 100 92	65	2900	45	4.0	439	325	650	1050	90	750	430	670	230	4-Φ20	Φ220	Φ180	40	8-Φ18	JG2-2	
100-315C	58 82 107	16.1 22.8 29.7	90 85 76	63	2900	37	4.0	385	325	650	1010	75	720	400	670	300	4-Φ20	Φ220	Φ180	40	8-Φ18	JG2-2	
100-350	60 100 120	16.7 27.8 33.3	153.6 150 142	72 57 74	2900	90	4.0	950	425	780	1310	90	950	580	870	380	4-Φ22	Φ220	Φ180	40	8-Φ18	JG3-2	
100-350A	61 87 113	16.9 24.2 31.4	145.6 142 134	75	2900	75	4.0	830	425	780	1260	90	900	560	820	360	4-Φ22	Φ220	Φ180	40	8-Φ18	JG3-1	
100-350B	58 82 107	16.1 22.8 29.7	138.6 135 127	75	2900	55	4.0	600	425	780	1190	90	850	520	770	320	4-Φ20	Φ220	Φ180	40	8-Φ18	JG3-1	


KCW型泵性能参数表、安装尺寸图及安装尺寸表

Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of KCW Pumps

安装尺寸图 Installation Dimensions Drawing

※ 泵底座有钢板折边和铸铁两种，具体尺寸订货时说明

The base plate can be steel plate and cast iron and the exact dimension has to be offered.

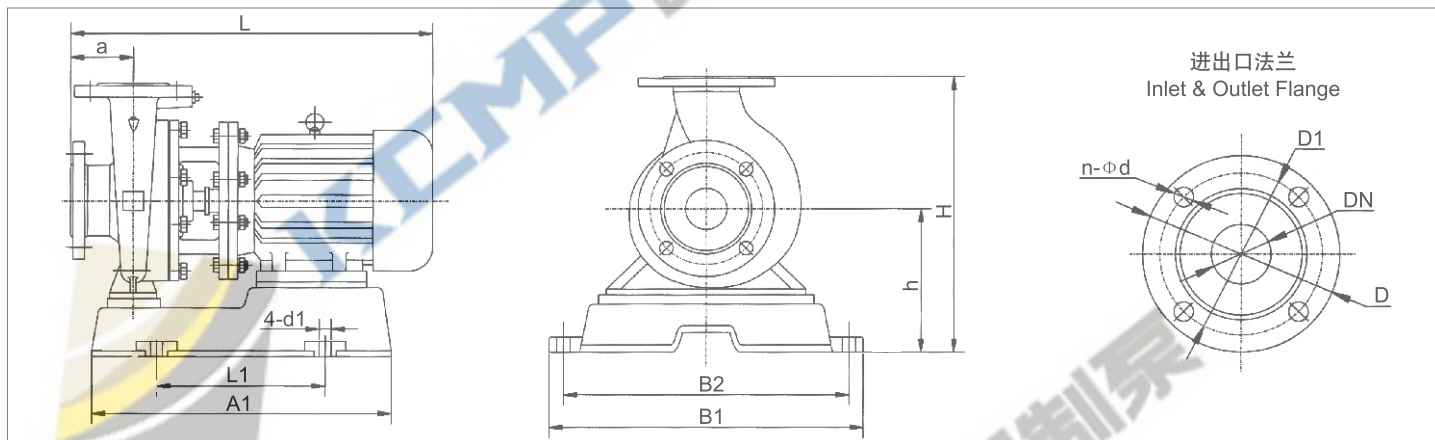

性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow		Head (m)	Efficiency %	r/min speed	Motor Power kW	(NPSH) _r (m) net positive suction head required	Weight (kg)	外形及安装尺寸 Outline and Installation Dimensions										进出口法兰尺寸 Inlet & Outlet Flange Dimensions				隔振器(垫) Vibration isolator
泵型号	m³/h	L/S	扬程	效率	转速	电机功率	必需汽蚀余量	重量	h	H	L	a	A1	B1	L1	B2	4-Φd1	D	D1	DN	n-Φd	规格Spec	
100-100(I)	96 160 192	26.7 44.4 53.3	14 12.5 10	64 73 70	2900	11	4.5	115	260	520	770	90	570	330	520	230	4-φ 18	φ 220	φ 180	40	8-φ 18	JG2-1	
100-125(I)	96 160 192	26.7 44.4 53.3	24 20 14	62 74 69	2900	15	4.5	168	260	520	770	90	570	330	520	230	4-φ 18	φ 220	φ 180	40	8-φ 18	JG2-1	
100-125(I)A	84 140 168	23.3 39 46.7	20 17 12	64 72 68	2900	11	4.5	168	260	520	770	90	570	330	520	230	4-φ 18	φ 220	φ 180	40	8-φ 18	JG2-1	
100-160(I)	96 160 192	26.7 44.4 53.3	36 32 27	69 79 75	2900	22	5.6	210	280	545	900	90	620	360	570	260	4-φ 18	φ 220	φ 180	40	8-φ 18	JG2-1	
100-160(I)A	84 140 168	23.3 39 46.7	32 28 23.5	66 76 72	2900	18.5	5.0	210	280	545	870	90	620	340	570	240	4-φ 18	φ 220	φ 180	40	8-φ 18	JG2-1	
100-200(I)	96 160 192	26.7 44.4 53.3	53 50 45	69 79 78	2900	37	5.2	402	300	580	950	75	720	400	670	300	4-φ 18	φ 220	φ 180	40	8-φ 18	JG2-2	
100-200(I)A	84 140 168	23.3 39 46.7	48 45 40	64 74 73	2900	30	4.5	395	300	580	950	75	720	400	670	300	4-φ 18	φ 220	φ 180	40	8-φ 18	JG2-2	
100-200(I)B	60 100 120	16.7 27.8 33.3	43 40 36	72	2900	22	4.5	360	300	580	880	75	640	380	590	280	4-φ 18	φ 220	φ 180	40	8-φ 18	JG2-2	
100-250(I)	96 160 192	26.7 44.4 53.3	83 80 72	65 77 74	2900	55	4.8	560	300	600	1160	110	820	500	740	300	4-φ 20	φ 220	φ 180	40	8-φ 18	JG3-1	
100-250(I)A	84 140 168	23.3 39 46.7	75 72 65	60 72 69	2900	45	4.5	420	300	600	980	110	750	450	670	250	4-φ 20	φ 220	φ 180	40	8-φ 18	JG2-2	
100-250(I)B	60 100 120	16.7 27.8 33.3	68 65 58	70	2900	37	4.5	400	300	600	950	90	720	400	670	300	4-φ 18	φ 220	φ 180	40	8-φ 18	JG2-2	
125-100	96 160 192	26.7 44.4 53.3	13 12.5 12	82	2900	11	4.0	180	260	520	780	90	570	330	520	230	4-φ 18	φ 250	φ 210	40	8-φ 18	JG2-1	
125-100A	86 143 172	23.9 39.7 47.8	10.4 10 9.6	77	2900	7.5	4.0	125	240	500	710	90	480	290	430	190	4-φ 14	φ 250	φ 210	40	8-φ 18	JG2-1	
125-125	96 160 192	26.7 44.4 53.3	22.6 20 17	80	2900	15	4.0	220	260	520	780	90	570	330	520	230	4-φ 18	φ 250	φ 210	40	8-φ 18	JG2-2	
125-125A	86 143 172	23.9 39.7 47.8	18 16 13.6	77	2900	11	4.0	210	260	520	780	90	570	330	520	230	4-φ 18	φ 250	φ 210	40	8-φ 18	JG2-1	
125-160	96 160 192	26.7 44.4 53.3	36 32 28	78	2900	22	4.0	265	280	545	900	90	620	360	570	260	4-φ 18	φ 250	φ 210	40	8-φ 18	JG2-2	
125-160A	90 150 180	25 41.7 50	31.5 28 24.5	76	2900	18.5	4.0	230	280	545	870	90	620	340	570	240	4-φ 18	φ 250	φ 210	40	8-φ 18	JG2-2	
125-160B	83 138 166	21.7 38.3 46.1	27 24 21	73	2900	15	4.0	215	280	545	830	90	570	330	520	230	4-φ 18	φ 250	φ 210	40	8-φ 18	JG2-2	


KCW型泵性能参数表、安装尺寸图及安装尺寸表

Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of KCW Pumps

安装尺寸图 Installation Dimensions Drawing

※ 泵底座有钢板折边和铸铁两种，具体尺寸订货时说明

The base plate can be steel plate and cast iron and the exact dimension has to be offered.

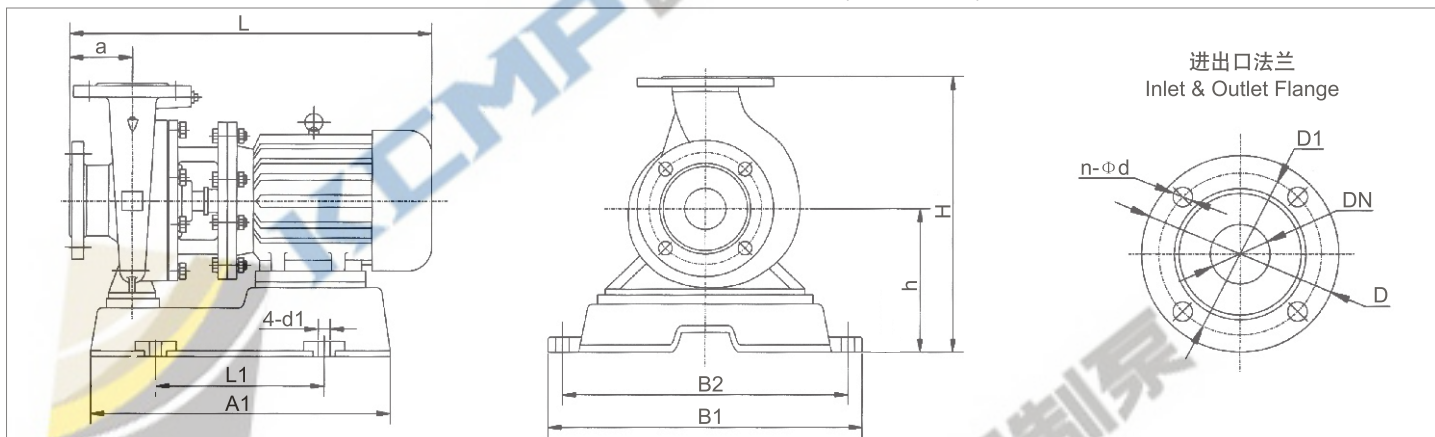

性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow		Head (m)	Efficiency %	r/min speed	Motor Power kW	(NPSH) _r (m) net positive suction head required 必需汽蚀余量	Weight (kg)	外形及安装尺寸 Outline and Installation Dimensions										进出口法兰尺寸 Inlet & Outlet Flange Dimensions				隔振器(垫) Vibration Isolator
泵型号	m³/h	L/S	扬程	效率	转速	电机功率	必需汽蚀余量	重量	h	H	L	a	A1	B1	L1	B2	4-Φd1	D	D1	DN	n-Φd	规格Spec	
125-200	96 160 192	26.7 44.4 53.3	55 50 46	77	2900	37	5.5	395	300	580	950	75	720	400	670	300	4-Φ18	Φ250	Φ210	40	8-Φ18	JG2-2	
125-200A	90 150 180	25 41.7 50	48.4 44 40.5	76	2900	30	5.5	380	300	580	950	75	720	400	670	300	4-Φ18	Φ250	Φ210	40	8-Φ18	JG2-2	
125-200B	83 138 166	21.7 38.3 46.1	41.3 37.5 34.5	75	2900	22	5.5	320	300	580	880	75	640	380	590	280	4-Φ18	Φ250	Φ210	40	8-Φ18	JG2-2	
125-250	96 160 192	26.7 44.4 53.3	87 80 73	75	2900	55	5.0	580	300	600	1160	110	820	500	740	300	4-Φ20	Φ250	Φ210	40	8-Φ18	JG3-1	
125-250A	90 150 180	25 41.7 50	76 70 84	74	2900	45	5.5	490	300	600	980	110	750	450	670	250	4-Φ20	Φ250	Φ210	40	8-Φ18	JG3-1	
125-250B	83 138 166	21.7 38.3 46.1	65 60 55	73	2900	37	5.5	430	300	600	950	90	720	400	670	300	4-Φ18	Φ250	Φ210	40	8-Φ18	JG3-1	
125-315	96 160 192	26.7 44.7 53.3	133 125 119	70	2900	90	5.0	790	350	680	1330	100	950	560	870	360	4-Φ22	Φ250	Φ210	40	8-Φ18	JG3-1	
125-315A	90 150 180	25 41.7 50	117 110 104.6	70	2900	75	5.0	710	350	680	1280	100	900	560	820	360	4-Φ22	Φ250	Φ210	40	8-Φ18	JG3-1	
125-315B	86 143 172	23.9 39.7 47.8	106.4 100 95.2	69	2900	75	5.0	705	350	680	1280	100	900	560	820	360	4-Φ22	Φ250	Φ210	40	8-Φ18	JG3-1	
125-315C	80.5 134 161	22.4 37.2 44.7	96 88 86	67	2900	55	5.0	585	350	680	1210	100	850	500	770	300	4-Φ22	Φ250	Φ210	40	8-Φ18	JG3-1	
150-125	96 160 192	26.7 44.4 53.3	22.6 20 17	66 76 76	2900	11	4.0	210	260	520	840	90	560	330	510	230	4-Φ18	Φ285	Φ240	40	8-Φ22	JG2-1	
150-125A	90 150 180	25 41.7 50	18 16 13.6	77	2900	7.5	4.0	130	240	500	735	90	510	290	460	190	4-Φ14	Φ285	Φ240	40	8-Φ22	JG2-1	
150-160	96 160 192	26.7 44.4 53.3	36 32 27	75	2900	22	4.0	270	280	540	1000	90	620	360	570	260	4-Φ18	Φ285	Φ240	40	8-Φ22	JG2-2	
150-160A	90 150 180	25 41.7 50	32 28 23.5	76	2900	18.5	4.0	230	280	540	930	90	620	360	570	260	4-Φ18	Φ285	Φ240	40	8-Φ22	JG2-2	
150-160B	84 140 168	23.3 39 46.7	27 24 21	73	2900	15	4.0	220	280	540	895	90	570	330	520	230	4-Φ18	Φ285	Φ240	40	8-Φ22	JG2-2	
150-200	140 200 260	38.9 55.6 72.2	13.8 12.5 10.6	68 78 78	1450	15	3.0	265	350	675	885	100	640	380	590	280	4-Φ18	Φ285	Φ240	40	8-Φ22	JG2-2	
150-200A	125 176 232.5	34.7 49.7 64.6	11 10 8.5	66 76 76	1450	11	3.0	244	350	675	840	100	600	380	550	280	4-Φ18	Φ285	Φ240	40	8-Φ22	JG2-2	
150-200B	110 160 207	31 44.4 57.6	9.2 8 6.8	75	1450	7.5	3.0	275	330	655	735	100	550	380	500	280	4-Φ14	Φ285	Φ240	40	8-Φ22	JG2-2	


KCW型泵性能参数表、安装尺寸图及安装尺寸表

Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of KCW Pumps

安装尺寸图 Installation Dimensions Drawing

※ 泵底座有钢板折边和铸铁两种，具体尺寸订货时说明

The base plate can be steel plate and cast iron and the exact dimension has to be offered.

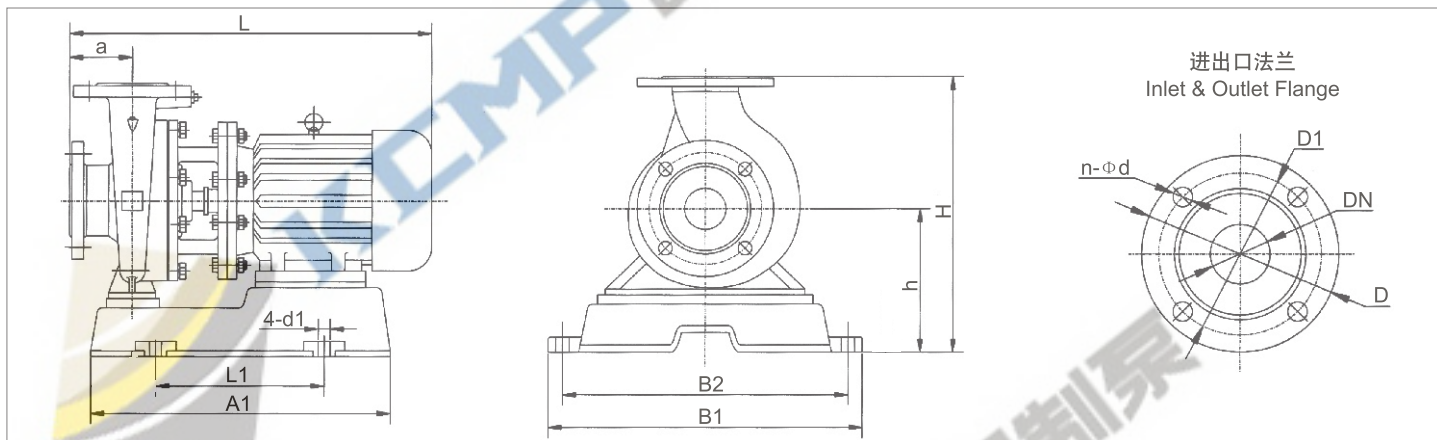

性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type 泵型号	流量Q Flow		Head (m) 扬程	Efficiency 效率	r/min speed 转速	Motor Power 电机功率	(NPSH) r (m) net positive suction head required 必需汽蚀余量	Weight (kg) 重量	外形及安装尺寸 Outline and Installation Dimensions										进出口法兰尺寸 Inlet & Outlet Flange Dimensions				隔振器(垫) Vibration isolator
	m³/h	L/S							h	H	L	a	A1	B1	L1	B2	4-Φd1	D	D1	DN	n-Φd	规格Spec	
150-250	140 200 260	38.9 55.6 72.2	21.8 20 17	73 79 77	1450	18.5	3.0	300	350	690	915	85	650	400	600	300	4-Φ20	Φ285	Φ240	40	8-Φ22	JG2-2	
150-250A	129 184.4 240	35.8 51.2 66.7	18.5 17 14.4	72 78 76	1450	15	3.0	262	350	690	895	85	650	400	600	300	4-Φ20	Φ285	Φ240	40	8-Φ22	JG2-2	
150-250B	117 167 217.5	32.5 46.4 60.4	15.2 14 12	76	1450	11	3.0	241	350	690	850	85	600	400	550	300	4-Φ20	Φ285	Φ240	40	8-Φ22	JG2-2	
150-315	140 200 260	38.9 55.6 72.2	33.8 32 28	70 78 73	1450	30	2.5	410	380	760	1025	90	760	520	680	320	4-Φ22	Φ285	Φ240	40	8-Φ22	JG2-2	
150-315A	131 187 243	36.4 51.9 67.5	29.5 28 24.5	69 77 77	1450	22	3.5	335	380	760	950	90	720	520	640	320	4-Φ20	Φ285	Φ240	40	8-Φ22	JG2-2	
150-315B	121 173 225	33.5 48.1 62.5	25 24 21	76	1450	18.5	3.5	315	380	760	910	90	680	520	600	320	4-Φ20	Φ285	Φ240	40	8-Φ22	JG2-2	
150-350	96 160 192	26.7 44.4 53.3	153.6 150 142.8	80	2900	110	5.5	970	400	780	1700	90	1050	660	970	460	4-Φ22	Φ285	Φ240	40	8-Φ22	JG3-2	
150-350A	90 150 180	25 41.7 50	145.6 142 134.8	70	2900	110	5.2	790	400	780	1270	90	1000	560	920	360	4-Φ22	Φ285	Φ240	40	8-Φ22	JG3-1	
150-350B	84 140 168	23.3 39 46.7	138.6 135 127.8	65 76 74	2900	90	5.5	705	400	780	1220	90	940	550	860	350	4-Φ22	Φ285	Φ240	40	8-Φ22	JG3-1	
150-400	140 200 260	38.9 55.6 72.2	53 50 44	68 75 71	1450	45	3.5	490	415	815	1090	80	780	500	700	300	4-Φ22	Φ285	Φ240	40	8-Φ22	JG3-1	
150-400A	131 187 243	36.4 51.9 67.5	46.6 44 38.3	67 74 70	1450	37	3.5	454	415	815	1060	80	760	500	680	300	4-Φ20	Φ285	Φ240	40	8-Φ22	JG3-1	
150-400B	122 174 226.5	33.9 48.3 62.9	40 38 33	73	1450	30	3.5	435	415	815	1045	80	760	500	680	300	4-Φ20	Φ285	Φ240	40	8-Φ22	JG3-1	
150-400C	112 160 208	31.1 44.4 57.8	34 32 28	71	1450	22	3.5	365	415	815	970	80	720	500	640	300	4-Φ20	Φ285	Φ240	40	8-Φ22	JG3-1	
150-250(I)	120 200 240	33.3 55.6 66.7	87 80 72	65 76 74	2900	75	4.5	702	370	710	1245	100	880	550	800	350	4-Φ22	Φ285	Φ240	40	8-Φ22	JG3-1	
150-250(I)A	112 187 224	31.1 51.9 62.2	76 70 63	64 75 73	2900	55	4.5	561	350	690	1175	100	820	500	640	300	4-Φ20	Φ285	Φ240	40	8-Φ22	JG3-1	
150-250(I)B	104 173 208	28.9 48.1 57.8	65 60 54	63 74 72	2900	45	4.5	460	350	690	1090	100	740	450	660	250	4-Φ20	Φ285	Φ240	40	8-Φ22	JG3-1	
150-315(I)	120 200 240	33.3 55.6 66.7	133 125 120	58 73 75	2900	110	4.5	980	400	780	1700	90	1050	660	970	460	4-Φ22	Φ285	Φ240	40	8-Φ22	JG3-2	
150-315(I)A	112 187 224	31.1 51.9 62.2	116 110 105	57 72 74	2900	90	4.5	800	400	780	1270	90	1000	560	920	360	4-Φ22	Φ285	Φ240	40	8-Φ22	JG3-1	


KCW型泵性能参数表、安装尺寸图及安装尺寸表

Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of KCW Pumps

安装尺寸图 Installation Dimensions Drawing

※ 泵底座有钢板折边和铸铁两种，具体尺寸订货时说明

The base plate can be steel plate and cast iron and the exact dimension has to be offered.

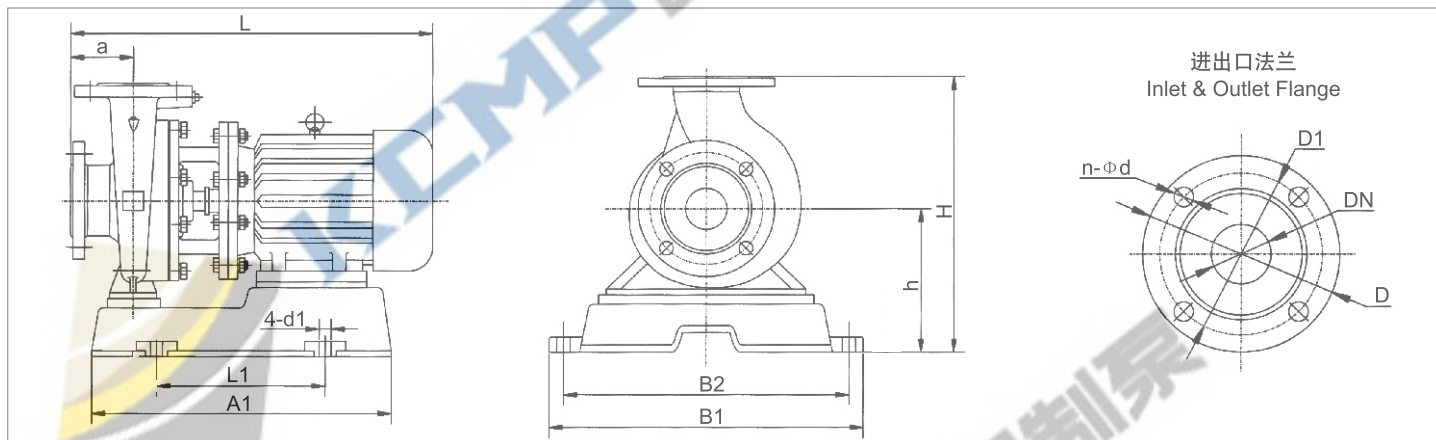

性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow		Head (m)	Efficiency %	r/min speed	Motor Power kw	(NPSH) r (m) net positive suction head required	Weight (kg)	外形及安装尺寸 Outline and Installation Dimensions										进出口法兰尺寸 Inlet & Outlet Flange Dimensions				隔振器(垫) Vibration isolator
泵型号	m³/h	L/S	扬程	效率	转速	电机功率	必需汽蚀余量	重量	h	H	L	a	A1	B1	L1	B2	4-Φd1	D	D1	DN	n-Φd	规格Spec	
150-315(I)B	104 173 208	28.9 48.1 57.8	100 95 91	55 70 72	2900	75	4.5	724	400	780	1220	90	940	550	860	350	4-Φ22	Φ285	Φ240	40	8-Φ22	JG3-1	
200-200	140 200 260	38.9 55.6 72.2	13.8 12.5 10.6	68 78 78	1450	15	3.0	265	350	670	890	100	660	410	610	310	4-Φ18	Φ340	Φ295	40	12-Φ22	JG2-2	
200-200A	125 179 232.5	34.7 49.7 64.6	11 10 8.5	66 76 76	1450	11	3.0	244	350	670	845	100	610	410	560	310	4-Φ18	Φ340	Φ295	40	12-Φ22	JG2-2	
200-250	140 200 260	38.9 55.6 72.2	21.8 20 17	73 79 77	1450	18.5	3.0	305	350	710	915	100	660	410	610	310	4-Φ18	Φ340	Φ295	40	12-Φ22	JG2-2	
200-250A	129 184 240	35.8 51.2 66.7	18.5 17 14.4	72 78 76	1450	15	3.0	267	350	710	895	100	660	410	610	310	4-Φ18	Φ340	Φ295	40	12-Φ22	JG2-2	
200-250B	117 167 217.5	32.5 46.4 60.4	15.2 14 12	76	1450	11	3.0	246	350	710	850	100	610	410	560	310	4-Φ18	Φ340	Φ295	40	12-Φ22	JG2-2	
200-315	140 200 260	38.9 55.6 72.2	33.8 32 28	70 78 78	1450	30	3.5	417	380	780	1025	90	760	500	680	300	4-Φ20	Φ340	Φ295	40	12-Φ22	JG3-1	
200-315A	131 189 243	36.4 51.9 67.5	29.5 28 24.5	69 77 77	1450	22	3.5	342	380	780	950	90	720	500	640	300	4-Φ20	Φ340	Φ295	40	12-Φ22	JG2-2	
200-315B	121 173 225	33.6 48.1 62.5	25 24 21	76	1450	18.5	3.5	322	380	780	910	90	680	500	600	300	4-Φ20	Φ340	Φ295	40	12-Φ22	JG2-2	
200-400	140 200 260	38.9 55.6 72.2	53 50 44	68 75 71	1450	45	3.5	498	415	850	980	90	780	510	700	310	4-Φ22	Φ340	Φ295	40	12-Φ22	JG3-1	
200-400A	131 187 243	36.4 51.9 67.5	46.6 44 38.3	67 74 70	1450	37	3.5	462	415	850	1005	90	760	510	680	310	4-Φ22	Φ340	Φ295	40	12-Φ22	JG3-1	
200-400B	122 174 226.5	33.9 48.6 62.9	40 38 33	73	1450	30	3.5	443	415	850	1025	90	760	510	680	310	4-Φ22	Φ340	Φ295	40	12-Φ22	JG3-1	
200-400C	112 160 208	31.3 44.4 57.8	34 32 28	71	1450	22	3.5	373	415	850	950	90	720	510	640	310	4-Φ20	Φ340	Φ295	40	12-Φ22	JG3-1	
200-200(I)	280 400 520	77.8 111.1 144	13.4 12.5 10.5	70 80 79	1450	22	4.0	382	415	855	970	90	930	560	900	460	4-Φ18	Φ340	Φ295	40	12-Φ22	JG3-1	
200-200(I)A	250 358 465	69.4 99.4 129.2	10.7 10 8.5	68 78 77	1450	18.5	4.0	346	415	855	910	90	930	560	900	460	4-Φ18	Φ340	Φ295	40	12-Φ22	JG3-1	
200-250(I)	280 400 520	77.8 111.1 144	22.2 20 14	75 80 72	1450	30	4.0	475	380	780	1035	110	760	500	680	300	4-Φ20	Φ340	Φ295	40	12-Φ22	JG3-1	
200-250(I)A	250 358 465	69.4 99.6 129.2	18 141 1.2	73 78 70	1450	22	4.0	405	380	780	965	110	760	500	680	300	4-Φ20	Φ340	Φ295	40	12-Φ22	JG3-1	
200-250(I)B	226 322 419	62.8 89.4 116.4	14.4 13 7.3	70 75 67	1450	18.5	4.0	387	380	780	925	110	680	500	600	300	4-Φ20	Φ340	Φ295	40	12-Φ22	JG3-1	


KCW型泵性能参数表、安装尺寸图及安装尺寸表

Performance Parameters Table, Installation Dimensions Drawing and Installation Dimensions Table of KCW Pumps

安装尺寸图 Installation Dimensions Drawing

※ 泵底座有钢板折边和铸铁两种，具体尺寸订货时说明

The base plate can be steel plate and cast iron and the exact dimension has to be offered.

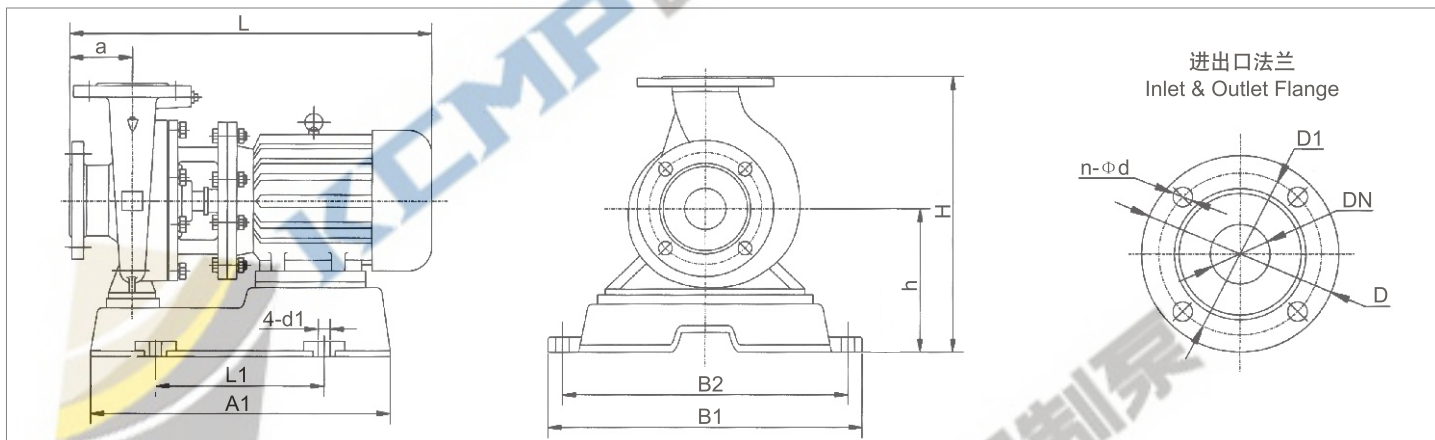

性能参数表及安装尺寸表 Performance Parameters Table and Installation Dimensions Table

Type	流量Q Flow		Head (m)	Efficiency %	r/min speed	Motor Power	(NPSH) _r (m) net positive suction head required	Weight (kg)	外形及安装尺寸 Outline and Installation Dimensions										进出口法兰尺寸 Inlet & Outlet Flange Dimensions				隔振器(垫) Vibration isolator
泵型号	m³/h	L/S	扬程	效率	转速	电机功率	必需汽蚀余量	重量	h	H	L	a	A1	B1	L1	B2	4-Φd1	D	D1	DN	n-Φd	规格Spec	
250-500B	339 508 575	94.2 141.1 159.7	46 43 40	75	1450	110	5.5	1600	455	1000	1400	150	1080	720	1000	520	4-φ22	φ405	φ355	40	12-φ26	JG3-2	
300-235	540 720 900	150 200 250	20.5 18 15.0	77 81 74	1450	55	5.0	1075	525	1120	1370	150	920	720	840	520	4-φ22	φ460	φ410	40	12-φ26	JG3-2	
300-235A	450 600 720	125 166 200	17.2 15 12.5	74 79 77	1450	45	5.0	970	525	1120	1320	150	850	720	770	520	4-φ22	φ460	φ410	40	12-φ26	JG3-2	
300-235B	420 540 650	116.7 150 181	14.3 12.8 10.5	73 78 70	1450	37	5.0	925	525	1120	1250	150	830	720	750	520	4-φ22	φ460	φ410	40	12-φ26	JG3-2	
300-250	540 720 900	150 200 250	22.5 20 17	80 83 84	1450	55	6.0	1085	525	1120	1300	150	920	720	840	520	4-φ22	φ460	φ410	40	12-φ26	JG3-2	
300-250A	450 600 720	136 166 200	19.5 17 14	81	1450	45	6.0	980	525	1120	1300	150	850	720	770	520	4-φ22	φ460	φ410	40	12-φ26	JG3-2	
300-300	540 720 900	150 200 250	32 28 23	82	1480	75	5.0	1230	525	1180	1330	160	1040	720	960	520	4-φ22	φ460	φ410	40	12-φ26	JG3-2	
300-300A	450 600 720	125 166 200	27.5 24 20	80	1480	75	5.0	1095	525	1180	1330	160	1040	720	960	520	4-φ22	φ460	φ410	40	12-φ26	JG3-2	
300-300B	420 540 650	116.7 150 181	24 21 17	78	1480	55	5.0	980	525	1180	1330	160	980	720	900	520	4-φ22	φ460	φ410	40	12-φ26	JG3-2	
300-315	540 720 900	150 200 250	35 32 26	84	1480	90	4.5	1350	525	1180	1400	160	1100	720	1020	520	4-φ22	φ460	φ410	40	12-φ26	JG3-2	
300-315A	460 650 800	127.8 180 222	31.5 28 23.5	80	1480	75	4.5	1240	525	1180	1400	160	1040	720	960	520	4-φ22	φ460	φ410	40	12-φ26	JG3-2	
300-315B	420 580 700	116.7 161 194	27 24 20.0	78	1480	55	4.5	1100	525	1180	1350	160	980	720	900	520	4-φ22	φ460	φ410	40	12-φ26	JG3-2	
300-380	480 720 900	133.3 200 250	48 44 34	84	970	132	5.0	1900	525	1180	1835	160	1160	720	1080	520	4-φ22	φ460	φ410	40	12-φ26	JG4-1	
300-380A	444 666 833	123.3 185 231.4	41.4 38 30	80	970	110	5.0	1700	525	1180	1835	160	1100	720	1020	520	4-φ22	φ460	φ410	40	12-φ26	JG4-1	
300-380B	400 614 764	113.6 170.6 213.1	35 32 35	78	970	90	5.0	1530	525	1180	1715	160	1100	720	1020	520	4-φ22	φ460	φ410	40	12-φ26	JG4-1	
300-390	540 720 900	150 200 250	20.5 18 15.5	78 81 76	980	55	5.0	1300	525	1180	1500	160	1100	720	1020	520	4-φ22	φ460	φ410	40	12-φ26	JG3-2	
300-390A	450 600 720	126 167 200	17.2 15 12.8	77 79 75	980	45	5.0	1220	525	1180	1350	160	1040	720	960	520	4-φ22	φ460	φ410	40	12-φ26	JG3-2	
300-390B	400 540 650	111 150 180	14 12.5 11.5	74 77 76	980	37	5.0	1100	525	1180	1350	160	980	720	90	520	4-φ22	φ460	φ410	40	12-φ26	JG3-2	

www.cnkcmp.com

浙江凯程泵阀有限公司

ZHEJIANG KAICHENG PUMP & VALVE CO.,LTD.

地址: 浙江温州瓯北镇东瓯工业园区

ADD: DONGOU ,Oubei Industrial Zone,Wenzhou,Zhejiang.

邮编(P.C): 325105

电话(Tel): +86-577-67319088 67316738 67338887

传真(Fax): +86-577-67317668

E-mail:kcmp@cnkcmp.com



▲ 未经凯程公司书面授权, 不容许以任何形式对此说明书进行全部或部分复制。

Without the company's written authorization, not permitted to any form of this specification are copied in whole or in part.

公司型录采用生态纸张印刷。

Company profile by using ecological paper printing.

2012 CNKCMP CORPORATION